

DECORATIVE PAINT


G3 Exterior Flat Latex Paint

Emulsion Paint

water-base

Textured Acrylic Coating

GoMix®

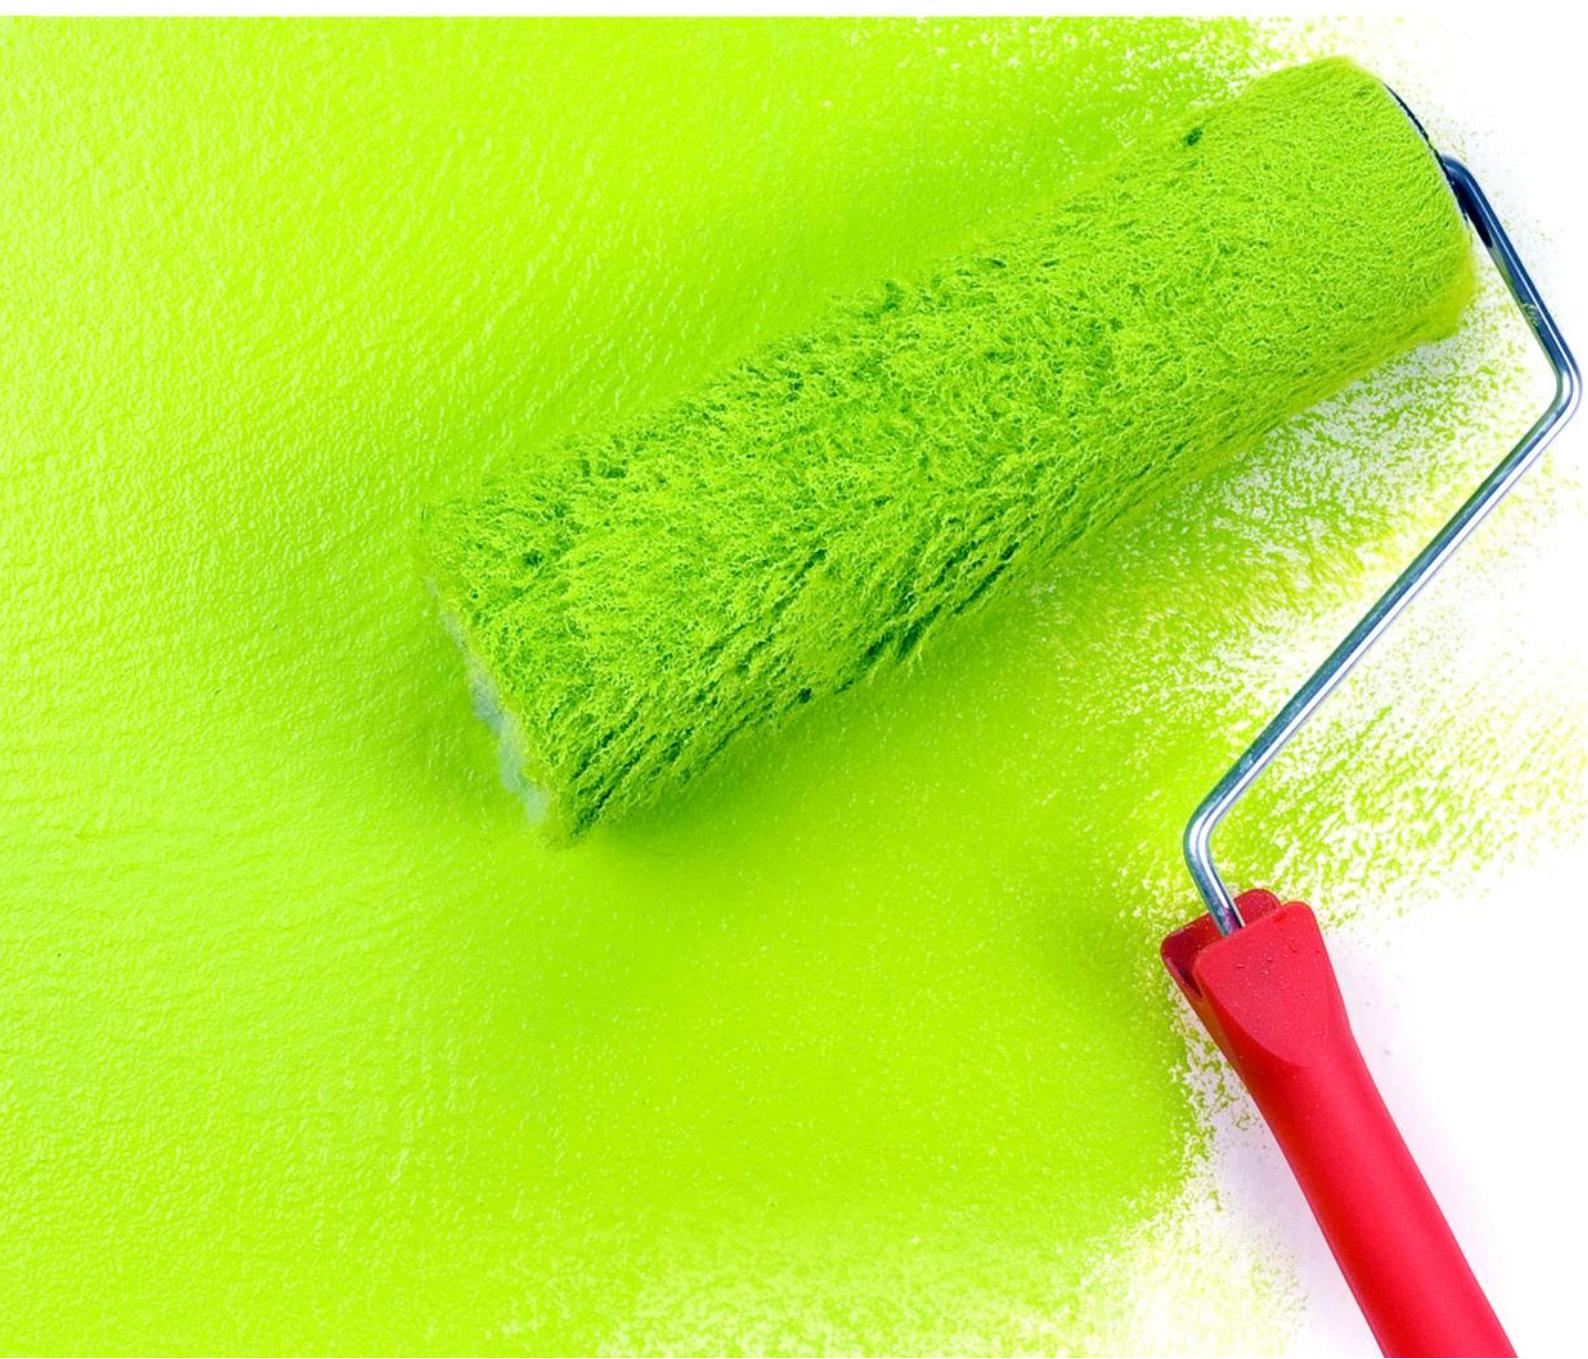

G3 EXTERIOR FLAT LATEX PAINT

G3 Exterior Flat Latex Paint is a matt acrylic paint, suitable for use on exterior surfaces of concrete, plywood, antirust primed steel, etc.

G3 Exterior Flat Latex Paint gives outstanding economy with the advantage of a low material consumption rate and excellent adhesion.

Application is by brush, roller, airless or conventional spray.

FEATURES

- 100% acrylic- Excellent adhesion and moisture resistance
- Excellent durability-Long lasting, non-chalking
- Excellent adhesion-Resist cracking and peeling
- U.V. protection-Looks like new longer
- Creates mildew resistant coating - Mildew/fungus/biological growth resistance on the paint film
- Low temperature application-May be applied down to 35° F (2°C)
- Fast drying-Turns jobs faster
- Soap and water cleanup-Easy to clean up hands and tools
- 10 years warranty

RECOMMENDED FOR

- Aluminum Siding
- Fiber Cement
- Brick Steel Siding
- Concrete/Masonry
- Vinyl Siding
- Block Wood
- Ferrous Metal

SURFACE PREPARATION

- Countersink nailheads. Fill and sand smooth.
- Remove rust, loose or peeling paint, repair imperfections and sand smooth.
- Wash off any dirt, grease and chalk with mild detergent and/or powerwash.

- Remove mildew stains with a mildew stain removing product. Rinse and allow to dry.
- Prepare new or weathered wood with Gomix Primer. Rinse and allow to dry.
- Etch bare metals with Gomix Primer. Rinse and allow to dry.
- Caulk windows, doors and other openings.
- Allow new stucco, plaster and masonry to cure 15 days before applying product.
- Use Gomix primer for repaired or uncoated surfaces, including woods that contain tannins (two primer coats required for redwood and cedar), and heavily stained areas. Lock in stains with the first primer coat; if necessary, apply a second primer coat.
- For optimal color development, in deep colors denoted with a dagger on the color chip, apply a custom tinted primer coat of Gomix primer. Primer coat will provide hide and reduce the number of topcoats required.



PACKING

6.5KG in 5L iron drum

20KG in 15L iron drum

APPLICATION

- Use G3 Exterior Flat Latex Paint on dry substrates when both air and surface temperatures are above 35°F (2°C). Surface temperatures must remain above 35°F (2°C) for 4 hours after applying.
- Stir paint occasionally. Intermix containers of the same product to ensure color and sheen uniformity.
- On semi-smooth surfaces, use a high quality 3/8 -1/2" nap roller cover, nylon/polyester brush or an airless sprayer (.015 - .021" spray tip, 60 mesh filter).
- On rough surfaces, use a high quality 3/4-1" nap roller cover.
- Typical coverage is 18-22 m² per gallon depending on surface texture, porosity and application method.
- No thinning usually. If necessary, thin with up to 1/4 pint (118 mL) of water per U.S. gallon (3.78L) of paint. However, if using a sprayer, thin with water at a rate of no more than 1/2 pint (236 mL) per gallon.
- More than one topcoat may be required for complete hide.

DRY TIME

- Dries to the touch in 2 hours at 77°F (25°C) and 50% humidity. Allow at least 4 hours of dry time between coats.
- Dries to the touch in 4 hours at 35°F (2°C) to 45°F (7°C) and 50% humidity. Allow at least 8 hours of dry time between coats.
- On heavy stains and woods that contain tannins, allow 12-16 hours of dry time between coats.
- Longer dry time required in cooler temperatures and higher humidity.
- Darker colors may require longer dry time between coats.
- After 2-4 weeks, cured paint film could be cleaned with a mild, non-abrasive liquid detergent.
- Dry paint film is mildew resistant.

CLEAN UP & STORAGE

- Use soap and water.
- Properly dispose of all soiled rags and protect unused product from freezing.
- For disposal of unused paint products, please contact your household refuse collection service.

ENVIRONMENTAL, HEALTH & SAFETY INFORMATION**INFORMATION**

- Use only with adequate ventilation.
- Do not breathe spray mist or sanding dust. Ensure fresh air entry during application and drying.
- Avoid contacting with eyes and prolonged or repeated contacting with skin.
- Avoid exposure to dust and spray mist by wearing a respirator during application, sanding and cleaning up.
- Follow respirator manufacturer's directions for respirator use. Close container after each use.
- Wash tools thoroughly after handling.

KEEP OUT OF REACH OF CHILDREN**PROTECT FROM FREEZING**

Refer to Material Safety Data Sheet for additional health and safety information.



TECHNICAL DATA SHEET

Technical Data	
Vehicle Type	100% Acrylic Latex
Pigment Type	Titanium Dioxide
Solids Volume	40% +/- 2%
Coverage per Gallon at Recommended Film Thickness	18-22 m ²
Recommended Film Thickness (Depending on surface texture and porosity. Be sure to estimate the right amount of paint for the job. This will ensure color uniformity and minimize the disposal of excess paint)	<ul style="list-style-type: none">– Dry 1.6 mils– Wet 4.0 mils
Dry Time @ 77° F (25° C) @ 50% RH (Painted surfaces can be washed after two weeks. High humidity and cool temperatures will result in longer dry, recoat and service times)	<ul style="list-style-type: none">– To Touch 2 Hour– To Recoat 2 to 4 Hours
Dries By	Evaporation, Coalescence
Finish: Flat	0 to 6 (60° and 85° Gloss Meter)
Surface Temperature at Application	<ul style="list-style-type: none">– Min. 50° F (10°C)– Max 90° F (32°C)
Storage Temperature	<ul style="list-style-type: none">– Min. 40° F (5°C)– Max 100° F (38°C)
Volatile Organic Compounds (VOC)	47 g/L (0.4 lbs. /gal.)
Weight Per Gallon	4.9 kg +/- 91 g

For further information consult our Technical Department

GoMix Co., Limited

Hong Kong Office: Bright Way Tower 33 Mong Kok Rd Mong Kok KL HK

Guangzhou Office: Rm 717-718, Huaerdun Hotel, #557, Xinshi R, Baiyun, Guangzhou, China

Tel.: 0086 20 6106 9818

Email: hkgomix@gmail.com

Fax: 0086 20 6106 9819

Web.: <http://www.gomixcoat.com>