


# WALL PUTTY

## GM11 Interior Acrylic Putty

B2 Gypsum Plaster  
C475 Joint Comound  
R1 Smooth Putty  
R2 Finish Putty  
R3 Coarse Putty  
R4 Flex Putty  
GM11 Interior Acrylic Putty  
GM12 Exterior Acrylic Putty

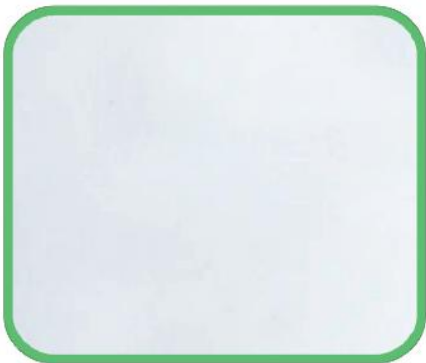

# GM11 INTERIOR ACRYLIC PUTTY

GM11 Interior Acrylic Putty is a ready- to- use filler and board jointing compound for most building surfaces, including sand/ cement render and gypsum board. It gives a high quality, even surface for painting.

GM11 is specially manufactured for the painter to repair and touch up surfaces, both old and new, prior to painting.

## PROPERTIES

GM11 Interior Acrylic Putty is made from a selected blend of acrylic polymers and precisely graded fillers.

- Quick drying, Easy to use
- Does not flake off
- Has high adhesion power
- Applicable up to 4mm in thickness
- Has high coverage
- Vapour permeable

## USES

- When dry, GM11 Interior Acrylic Putty bonds extremely well to cementitious materials, gypsum, gypsum boards, spray plasters, wood, galvanised steel lathings and all common building surfaces.
- Ideal as a gypsum board jointing compound and skim coat, for patching hairline cracks in walls, ceilings, repairing damage to plaster/paint work, nail holes in woodwork, making good around door architrave's and along the top of skirting boards.

## SURFACE PREPARATION

- **New surfaces:**  
Ensure that all dust, dirt and foreign matter are scraped and brushed away. Also ensure the surfaces are free from salts, oil, grease and ridges. Protect all adjacent surfaces not to be covered.
- **Old surfaces:**  
Before applying to old surfaces, ensure the substrate is firm. First wash down the surface with a sugar soap solution, rinse and allow drying before repairing or applying the primer.

## APPLICATION

- Apply the Wall Putty in a thin even layer. If a thick coat is necessary, apply several thin layers, allowing drying between layers.
- Lightly sand the final surface before painting, within 24 hour of application.

## PRECAUTIONS

- Avoid prolonged contact with eyes and skin.
- For detailed information refer to relevant material safety data sheet.

## PACKAGING

GM11 is supplied in 30kg plastic drum.



## STORAGE

- Store containers in a clean dry area protected from direct sunlight and extreme heat and cold.
- Unopened containers can be stored for 12 months. Use oldest material first.

For further information consult our Technical Department

### GoMix Co., Limited

**Hong Kong Office:** Bright Way Tower 33 Mong Kok Rd Mong Kok KL HK

**Guangzhou Office:** Rm 717-718, Huaerdun Hotel, #557, Xinshi R, Baiyun, Guangzhou, China

Tel.: 0086 20 6106 9818

Email: [hkgomix@gmail.com](mailto:hkgomix@gmail.com)

Fax: 0086 20 6106 9819

Web.: <http://www.gomixcoat.com>