
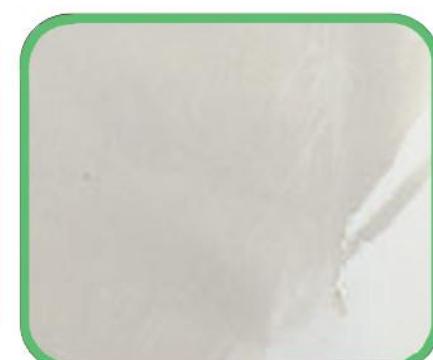


WALL PUTTY

GM12 Exterior Acrylic Putty

B2 Gypsum Plaster
C475 Joint Compound
R1 Smooth Putty
R2 Finish Putty
R3 Coarse Putty
R4 Flex Putty
GM11 Interior Acrylic Putty
GM12 Exterior Acrylic Putty

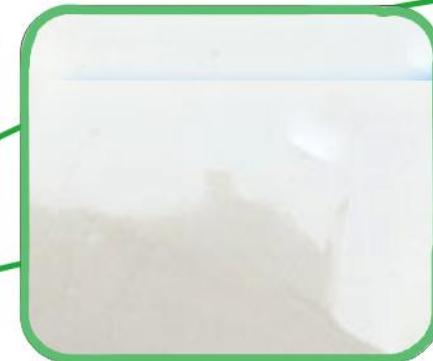

GM12 EXTERIOR ACRYLIC PUTTY

GoMix GM12 Exterior Acrylic Putty is a ready to use filler for use on all common building surfaces, including timber. It gives a high quality, even surface for painting.

GM12 Exterior Acrylic Putty is specifically manufactured for the painter to repair and touch up exterior and interior surfaces, both new and old, prior to painting.

GM12 has elastic properties, does not flake off, is permanent and retains its adhesion.

PROPERTIES

GoMix GM12 Exterior Acrylic Putty is formulated using acrylic binders and precisely graded fillers.

- Alkali resistant, Quick drying
- Easy to apply
- High crack resistance
- Tough durable filler
- Weather resistant
- Excellent adhesive

USE

When dry, GM12 is weather resistant and bonds extremely well to cementitious materials, gypsum, gypsum boards, Spray plaster and wood.

It is used as a thin coat filler for patching hairline cracks in walls, ceilings, soffits, repair to damaged plasterwork, paintwork, filling holes and defects in woodwork, making good to exposed concrete, filling of dents in galvanised and anti-rust primed metal.

For further information consult our Technical Department

GoMix Co., Limited

Hong Kong Office: Bright Way Tower 33 Mong Kok Rd Mong Kok KL HK

Guangzhou Office: Rm 717-718, Huaerdun Hotel, #557, Xinhshi R, Baiyun, Guangzhou, China

Tel.: 0086 20 6106 9818

Email: hkgomix@gmail.com

Fax: 0086 20 6106 9819

Web.: <http://www.gomixcoat.com>

SURFACE PREPARATION

- Ensure dust, dirt, foreign matters are brushed away. Ridges and form oil should be removed.
- When applying filler to old painted surfaces first wash down with soda / water solution, rinse and allow drying before filling.
- To stabilize a surface which shows signs of dusting or flaking, the use of Penetrating Primer is recommended.

APPLICATION

- Apply the filler in a thin, even layer; if the area under repair requires a thick coat, apply several thin layers, allowing each layer to dry before adding the next.
- Lightly sandpaper over the dry final surface before painting preferably within 9 hours of application.

PRECAUTIONS

Avoid prolonged contact with eyes and skin.

PACKAGING

30kg plastic drum / White color



STORAGE

- Store containers in a clean dry area protected from direct sunlight and extreme heat and cold.
- Unopened containers can be stored for 12 months.